



2019

THERMOREGULATORS
& THERMOSEALERS

www.falcinstruments.it




THERMOREGULATORS & THERMOSEALERS

- 4 ■ THERMOREGULATORS
- 4 | Digital head control
- 4 | Bi-metal
- 5 | Electronic
- 5 | Digital multifunction
- 6 ■ THERMOSEALERS



THERMOREGULATORS

Digital head control

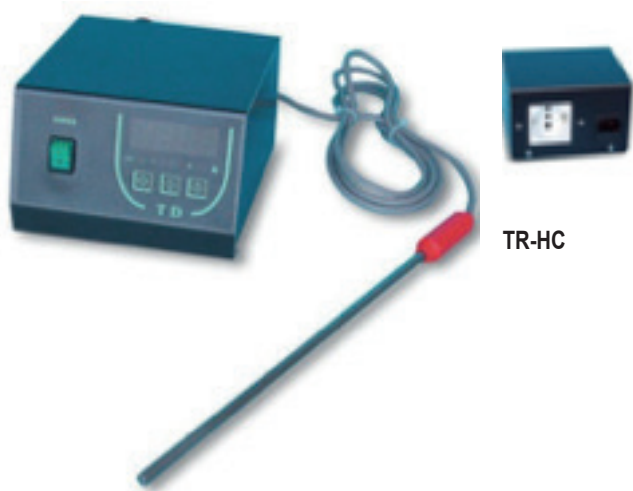

TR-HC



Ideal for accurate control of equipment without a thermostat, and directly check the liquid.



Display to read the working temperature.
PID thermoregulator with PT100 probe
Probe cable L. 2m

Technical data		TR-HC
Temperature range	°C	-10 +350
Precision	°C	± 0.5
Max. power	W	2200
Ambient conditions	°C	0-50
Probe	TR	PT100
Probe ØxW	mm	6x230
External dimensions LxWxH	mm	130x135x95
Weight	Kg	0,7
Code		633.0718.00
V/HZ 230/50-60		SAFETY CLASS 3.1
		PROTECTION CLASS 30

Bi-metal



TR- B



Ideal for controlling equipment without thermoregulator



Graduated scale
Temperature control ON/OFF

Technical data		TR-B
Max. power	W	2200
External dimensions WxDxH	mm	130x140x85
Code		633.0710.00
V/HZ 230/50-60		SAFETY CLASS 3.1
		PROTECTION CLASS 30

THERMOREGULATORS



Ideal for reliable control of equipment without thermoregulator



Graduated scale
Electronic temperature control

Electronic

TR-E



Technical data		TR-E
Max. power	W	1500
External dimensions LxWxH	mm	130x140x85
Code		633.0712.00

V/HZ 230/50-60	SAFETY CLASS 3.1	PROTECTION CLASS 30
----------------	------------------	---------------------



14 daily programs



LCD Display shows the days of the week, the time, the number of programs and the the instrument functioning

Digital multifunction

TR-M



Standard CE - Inlet socket and Schuko plug

Technical data		TR-M
Max. load	W	680
External dimensions LxWxH	mm	60x40x100
Weight	gr	80
Code		633.0716.00

V/A 230/50-60	SAFETY CLASS 3.1	PROTECTION CLASS 30
---------------	------------------	---------------------

THERMOSEALERS



SK



Ideal for sealing of bags made of polyester and polypropylene with a maximum thickness of 100 microns



The sealing time is adjustable and it is indicated by a light at the end of the operation.

The maximum width of the seal is 2 mm

SPARE PARTS

Spare parts for SK 210

PTFE tape with heating element

Code 638.1430.33

Spare parts for SK 310

PTFE tape with heating element

Code 638.1430.35

Technical data		SK 210	SK 310
Seal length	mm	200	300
External dimensions LxWxH	mm	350x130x80	440x170x90
Power	W	250	300
Code		638.1430.20	638.1430.30

V/HZ 230/50-60

SAFETY CLASS 0

PROTECTION CLASS 0

ACCESSORIES



Bags in indivisible pack of 500						
Width x length	mm	80x130	100x200	150x250	200x250	250x300
Code		638.1431.07	638.1431.10	638.1431.15	638.1431.20	638.1431.25

Pipe length m 100						
Diameter	mm	100	200	300	400	500
Code		638.1432.10	638.1432.20	638.1432.30	638.1432.40	638.1432.50

THERMOSEALERS



Suitable for film/paper sterilization coil



The sealing time is adjustable and indicated by a light at the end of the operation



Sliding knife along the sealing bar.



DNT

SPARE PARTS

cartridge heater
Code 638.1434.42

Dati tecnici		DNT
Seal length	mm	250
Seal width	mm	8
External dimensions LxWxH	mm	420x300x220
Power	W	870
Weight	kg	8,3
Codice		638.1434.30

V/HZ 230/50-60

SAFETY CLASS 3.1

PROTECTION CLAS

ACCESSORIES

T-Paper: flat sterilization reels are designed for hospital, medical, dental, cosmetic, veterinary and podology uses and for all steam and gas sterilization processes.



Pipe lenght m 200						
Diameter	mm	75	100	150	200	250
Code		638.1435.07	638.1435.10	638.1435.15	638.1435.20	638.1435.25

THERMOSEALERS



ONE



Useful to seal all types of paper for sterilization, including folded paper



Digital control



Signal of bad sealing



The maximum seal length is 320 mm
The maximum seal width is 12 mm

SPARE PARTS

cartridge heater
Code 638.1434.42

Technical data		ONE
Seal length	mm	300
Seal width	mm	12
External dimensions LxWxH	mm	460x400x170
Power	W	320
Weight	Kg	8
Code		638.1434.40

V/HZ 230/50-60

SAFETY CLASS 3.1

PROTECTION CLASS 30



ACCESSORIES

T-Paper: flat sterilization reels are designed for hospital, medical, dental, cosmetic, veterinary and podology uses and for all steam and gas sterilization processes.

Pipe length m 200						
Diameter	mm	75	100	150	200	250
Code		638.1435.07	638.1435.10	638.1435.15	638.1435.20	638.1435.25

Notes

[illegible]

Notes

[illegible]



FALC INSTRUMENTS s.r.l.

Via G. M. Compagnoni, 2 | 24047 Treviglio (BG) - Italy

+39 0363 304660 | falc@falcinstruments.it | falcinstruments.it