


Thermo Scientific CryoMed Controlled-Rate Freezers

Dependable sample preparation



New PC Software!

- Backwards and forwards compatible from Windows® XP to Windows® 7 and 8
- Optimized profile design and operation
- Improved customer operation over previous generation
- Updated and enhanced profile creation
- Customizable fields for improved sample ID
- Can communicate with existing installed units
- Auto-scaling run graphs
- Improved review functionality
- Available in a package that includes software and RS-232-to-USB connector for controlled-rate freezer

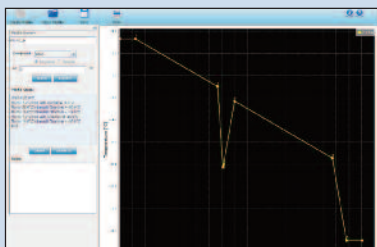

Thermo Scientific™ CryoMed™ controlled-rate freezers feature an integrated control system (consisting of freezing chamber, microprocessor control and printer – all in one benchtop unit), allowing multiple freezing profiles to be tailored for specific protocols. Freezer functionality is enhanced by a MS Windows®-based controlled-rate freezing interface software (included) that connects to your PC and external printer.

- Can be operated directly from the unit's built-in microprocessor or remotely through the PC interface
- Backlit LCD provides at-a-glance operational status
- Chamber and sample temperatures are monitored by Type T thermocouples, which eliminate lag time and provide "real time" responsiveness
- Four-digit access code for added security
- Six standard pre-set profiles and ten user defined profiles are standard

- Standard alarms provide for open thermocouple, heater malfunction, high/low temperature limit, temperature tracking, power failure and completion of run
- Controlled-rate freezer includes a Java® based PC software as a standard feature, compatible with current Windows® operating systems
- Dual solenoid valves increase LN₂ injection volume for precise temperature control and accelerated freezing
- Specifically designed air handling system and liquid nitrogen injection ring work in tandem for precise temperature control and uniformity
- Over-temperature protection for heating provides a safe working environment
- Excellent construction featuring Type 304 stainless steel exterior, foamed-in-place polyurethane insulation, Teflon® heat break and bulb-style gaskets for tight door seal

Thermo Scientific CryoMed Controlled-Rate Freezers (Temperature Range: -50°C to -180°C)

Model No.	Capacity cu. ft. (L)	Access Type	Electrical	Plug	Interior Dimensions W x D x H in. (cm)	Exterior Dimensions W x D x H in. (cm)	Shipping Weight lbs. (kg)	LN2 and Utility Connection
7450	0.6 (17)	Front Loading	120V, 60Hz	NEMA 5-15	7 x 12 x 13 (17.8 x 30.5 x 33)	31.7 x 21.2 x 20.4 (80.5 x 53.8 x 51.8)	200 (90.7)	22 psi, low-pressure supply tank required. Models are supplied with one 0.5", 45° flare stainless steel flexible transfer hose.
7451			220V, 50Hz	CEE 7/7				
7472			100V, 60Hz	NEMA 5-15				
7452	1.2 (34)	Front Loading	120V, 60Hz	NEMA 5-15	13 x 12 x 13 (33 x 30.5 x 33)	37.7 x 21.2 x 20.4 (95.8 x 53.8 x 51.8)	215 (97.5)	
7453			220V, 50Hz	CEE 7/7				
7473			100V, 60Hz	NEMA 5-15				
7454	1.7 (48.1)	Front Loading	120V, 60Hz	NEMA 5-15	19 x 12 x 13 (48.3 x 30.5 x 33)	43.7 x 21.2 x 20.4 (111 x 53.8 x 51.8)	235 (106.6)	
7455			220V, 50Hz	CEE 7/7				
7474			100V, 60Hz	NEMA 5-15				

Product Specifications

New Windows® 7-8 Compatible Software for Previous-Generation CryoMed Users*

Model No.	Description
4000407	Controlled-rate freezer companion PC software, Version 2.0, Compatible with Windows XP, 7 and 8
4000414	Upgrade kit consisting of PC software and an RS-232 to USB adapter cord

Ask Your Sales Representative About Thermo Scientific CryoMed Accessories



Learn More About Sample Preparation and Cryopreservation!

Visit thermoscientific.com/cold to learn more about how we can support your sample preparation, storage and tracking needs



* Software does not have to be purchased for Thermo Scientific CryoMed controlled-rate freezers purchased after May 26, 2014.

© 2014 Thermo Fisher Scientific Inc. All rights reserved. Windows is a registered trademark of Microsoft Corporation. Teflon is a registered trademark of DuPont. Java is a registered trademark of Sun Microsystems, Inc. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Australia +61 39757 4300
Austria +43 1 801 40 0
Belgium +32 53 73 42 41
China +86 21 6865 4588 or
+86 10 8419 3588
France +33 2 2803 2180
Germany national toll-free 0800 1 536 376
Germany international +49 6184 90 6000

India toll free 1800 22 8374
India +91 22 6716 2200
Italy +39 02 95059552
Japan +81 45 453 9220
Netherlands +31 76 579 55 55
New Zealand +64 9 980 6700
Nordic/Baltic/CIS Countries
+358 9 329 10200

Russia +7 812 703 42 15
Spain/Portugal +34 93 223 09 18
Switzerland +41 44 454 12 22
UK/Ireland +44 870 609 9203
USA/Canada +1 866 984 3766 (866-9-THERMO)

Other Asian Countries +852 2885 4613
Countries not listed: +49 6184 90 6000

Thermo
SCIENTIFIC

A Thermo Fisher Scientific Brand