

Labnet BioPette™ A Autoclavable Single- and Multi-channel Pipettors

Available in single-, eight- and twelve-channel configurations, all BioPette A pipettors feature smooth plunger movement with low pipetting forces. Volume can be set by turning either the thumb wheel or the plunger button. BioPette A pipettors have been designed to maintain their calibration, even after repeated use and autoclaving. A calibration key is included with each pipettor for easy in-house calibration.

BioPette A multi-channel pipettors feature individually spring-loaded piston assemblies for positive tip sealing and a curved ejector bar requiring minimal ejection force. The multi-channel manifold rotates 360° for ejecting and pipetting in any position.


Features

- ▶ Factory calibrated to strict ISO 8655 standards
- ▶ 3-year warranty
- ▶ Fully autoclavable and UV resistant
- ▶ Designed for universal fit with all common brands of pipet tips
- ▶ Adjustable tip ejector in all single-channel models



Ordering Information

BioPette™ A Single- and Multi-channel Pipettors

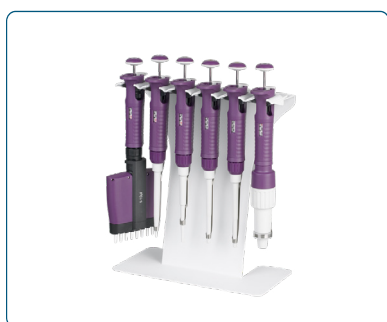

Cat. No.	Volume Range (µL)	Accuracy (%)	Precision (%)	Non-filtered Tip (µL)
P3960-2A	0.1 - 2	±40.0 to ±1.5	≤12.0 to ≤0.7	10
P3960-10A	0.5 - 10	±4.0 to ±0.5	≤2.8 to ≤0.4	10
P3960-20A	2 - 20	±3.0 to ±0.8	≤1.5 to ≤0.3	200
P3960-100A	10 - 100	±1.6 to ±0.8	≤0.8 to ≤0.2	200
P3660-200A	20 - 200	±1.2 to ±0.6	≤0.6 to ≤0.2	200
P3960-1000A	100 - 1,000	±1.6 to ±0.6	≤0.4 to ≤0.15	1,000
P3960-5000A	1,000 - 5,000	±0.6 to ±0.5	≤0.25 to ≤0.15	5,000
P3960-10000A	1,000 - 10,000	±2.5 to ±0.5	≤0.6 to ≤0.2	10,000
P4608-10A	1 - 10	±8.0 to ±2.0	≤6.0 to ≤1.2	10
P4608-50A	5 - 50	±4.0 to ±1.6	≤2.5 to ≤0.6	200
P4608-200A	20 - 200	±3.0 to ±1.0	≤1.5 to ≤0.6	200
P4608-300A	50 - 300	±1.6 to ±1.0	≤1.5 to ≤0.6	300
P4612-10A	1 - 10	±8.0 to ±2.0	≤6.0 to ≤1.2	10
P4612-50A	5 - 50	±4.0 to ±1.6	≤2.5 to ≤0.6	200
P4612-200A	20 - 200	±3.0 to ±1.0	≤1.5 to ≤0.6	200
P4612-300A	50 - 300	±1.6 to ±1.0	≤1.5 to ≤0.6	300

Cat. No.	Description
P3960-SK4	Labnet BioPette A Starter Kit Includes 4 single-channel pipettors with calibration keys and shelf clips: 0.5 - 10 µL (Cat. No. P3960-10A), 2 - 20 µL (Cat. No. P3960-20A), 20 - 200 µL (Cat. No. P3960-200A), 100 - 1,000 µL (Cat. No. P3960-1000A); universal carousel stand for six single-channel pipettors (Cat. No. P3985-P); 3 racks of pipet tips: 10 µL (Cat. No. P1000-10-R), 200 µL (Cat. No. P1000-200-R), and 1,000 µL (Cat. No. P1000-1000-R).

Accessories

Cat. No.	Description
SP19475	Shelf clip for one single- or multi-channel pipettor
P5423	Universal stand for one single-channel, 8-channel, or 12-channel pipettor
P3989	Linear rack for six single- or multi-channel pipettors
P3985-P	Universal carousel stand for six single-channel pipettors

Related products

Cat. No.	Description	Quantity
P1000-10-R	Labnet BioFree™ Pipet Tips, 10 µL, racked, non-sterile	4,800
P1000-10X-R	Labnet BioFree Pipet Tips, 10 µL, extended length, racked, non-sterile	4,800
P1000-200-R	Labnet BioFree Pipet Tips, 200 µL, racked, non-sterile	4,800
P1000-300-R	Labnet BioFree Pipet Tips, 300 µL, racked, non-sterile	4,800
P1000-1000-R	Labnet BioFree Pipet Tips, 1,000 µL, racked, non-sterile	5,000
P3998	Labnet BioFree Pipet Tips, 5,000 µL, bulk, non-sterile	250
K943	Pipet Tips, 10,000 µL, bulk, non-sterile	100
P9734	Plate, 96 x 350 µL, polystyrene, clear, flat bottom	100
P9735	Plate, 96 x 270 µL, polystyrene, clear, round bottom	100
P9803	Krystal plate, 96 x 350 µL, black, tissue culture treated	100
R8300	Storage box with hinged lid, natural, 100 x 1.5/2.0 mL	1
R8300-A	Storage box with hinged lid, 100 x 1.5/2.0 mL, assorted color pack	5
R8300-BLK	Storage box with hinged lid, 100 x 1.5/2.0 mL, black opaque	1

Labnet

www.labnetlink.com

Products described in this brochure are subject to availability and technical modification. Errors excepted.
Corning Incorporated reserves the right to improve, enhance, or otherwise modify its products without prior notification.
© 2020 Corning Incorporated. All rights reserved. 11/20 CLSLN-EQ-015 REV2